

Read Me First

for the HP ProCurve 8206zl Switch
Software Version K.14.34 or Greater

Contents

About Your HP ProCurve 8206zl Switch Manual Set page 1

Minimum Supported Software Version page 2

View or Download the Software Manual Set..... page 3

HP ProCurve Software Tools that Provide Network Management page 3

Software Updates page 3

Premium Software Features page 4

Mini-GBIC Operation Notes..... page 4

Saving the Configuration After Installing or Exchanging a Module..... page 5

Module Hot Swap Operation Notes page 5

About Your HP ProCurve 8206zl Switch Software Manual Set

Document	Available on the ProCurve Web site	Shipped with the Switch
<i>PoE Planning and Implementation Guide</i>	Yes	No
<i>Read Me First</i> (this document) ¹	Yes	Yes
<i>Switch Quick Setup Guide</i>	No	Yes
<i>General Safety and Regulatory Information</i>	Yes	Yes
<i>8206zl Safety and Regulatory</i>	Yes	Yes
<i>Installation and Getting Started Guide</i> ¹	Yes	No
<i>Management and Configuration Guide</i> ¹	Yes	No
<i>Advanced Traffic Management Guide</i> ¹	Yes	No
<i>Multicast and Routing Guide</i> ¹	Yes	No
<i>Access Security Guide</i> ¹	Yes	No
<i>IPv6 Configuration Guide</i> ¹	Yes	No
<i>Command Line Interface Reference Guide</i> ¹	Yes	No
<i>Event Log Message Reference Guide</i> ¹	Yes	No
<i>Release Notes (for software updates)</i> ¹	Yes	No

¹The latest edition is available in PDF and downloadable. See [“View or Download the Software Manual Set”](#) on page 3.

Minimum Supported Software Version

The HP ProCurve 8206zl and 8212zl switches both use the same management module (J9092A). However, the 8206zl switch Management Module requires software release K.14.34 or greater, and the 8212zl switch Management Module requires software release K.12.31 or greater.

Using a spare or 8212zl Management Module in an 8206zl switch

Any J9092A management module will operate in both the 8206zl and 8212zl chassis when the correct minimum software version is loaded prior to installing the module. If you want to install a management module taken from an 8212zl switch into an 8206zl switch, you will first need to update the module's software to its minimum supported release, K.14.34 or greater.

The management module must be updated in the 8212zl switch prior to installing in the 8206zl switch. This is because the 8206zl switch does not recognize a management module running software prior to K.14.34.

Once a management module has been updated to the minimum supported 8206zl switch software, all future software updates can be performed on either the 8206zl or 8212zl switches.

Updating Software and BootROM to work in an 8206zl Module

In order to update an 8212zl management module to work in an 8206zl switch, you must first update the module's software. Depending on the existing 8212zl software version, the update requires either a one or two-step process.

If the current software on the 8212zl management module is K.12.31 through K.13.48, you must update the software twice. The first update is to version K.13.60, and the second update is to K.14.34 or newer.

If the current software on the 8212zl management module is K.13.51 or newer K.13 version, you need only to update the software once to version 14.34 or newer. Refer to the 8200zl switch Release Notes for additional details regarding software upgrades.

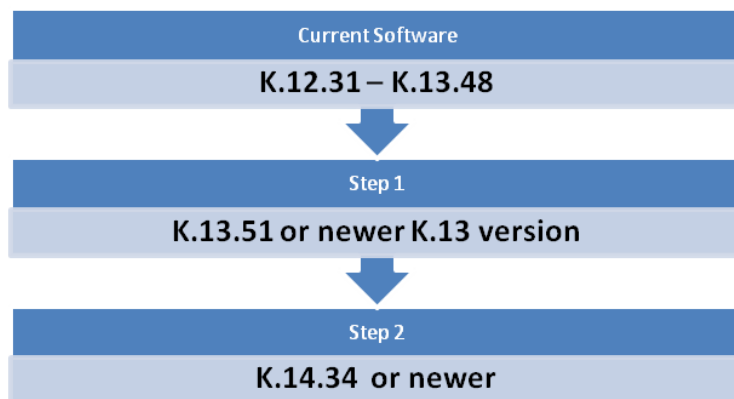


Figure 1. Software upgrade process

View or Download the Software Manual Set

For a complete set of manuals for your HP ProCurve product installation, software features, and configuration information, visit the HP ProCurve Web site, where you can freely view or download the latest manuals for your product. To do so:

1. Go to www.procurve.com/manuals
2. To display the list of downloadable manuals, click on the following links.

HP ProCurve 8200zl switch

(You may want to bookmark this Web page for easy access in the future.)

HP ProCurve Software Tools that Provide Network Management

HP ProCurve Manager and HP ProCurve Manager Plus provide basic-to-advanced device-handling capabilities such as mapping, configuration and monitoring across LAN and Wireless LAN networks in order to improve productivity and simplify management. ProCurve Manager and a 60-day trial of ProCurve Manager Plus are available for free on the ProCurve Networking Web site. Also available on the ProCurve Web site are 60-day free trials of Mobility Manager, Identity-Driven Manager, and Network Immunity Manager. To download any of these options, visit www.hp.com/go/procurve/software and click on **Network Management**.

Software Updates



ProCurve Networking provides software updates on the ProCurve Web site for your switch. To access the software updates, go to the ProCurve Web site at www.procurve.com/software, then click on **Switches** to go to the page that has the download for your switch.

Register for Automatic Notification of Updates. You can receive email notices of new software updates by registering your ProCurve product on the ProCurve Web portal. To begin this easy process, go to www.procurve.com and click on **My ProCurve Sign In**.

To determine whether you have the latest software, you can compare the software version that is available on the web site with the version that is currently installed on your switch. Follow the instructions below to determine the current software version on your switch.

To Determine the Current Software Version in Your Switch. Use any of the following methods to view the software version:

- Start a console session with the switch. In the console login screen (the first screen displayed), the **Software revision** line under the switch name shows the software version.
 - If you already have a console session going, at the prompt enter the **show version** command. The resulting display lists the current software version.
 - In the web browser interface, click on the **Identity** tab. The current software version is listed as the **revision** number in the **Version** line.
-

Premium Software Features

Additional Premium software features for this switch can be acquired by purchasing a Premium software license and installing it on the switch. The 8200zl Premium license is J9474A.

For the most current information about the features included in the Premium license package, refer to the release notes for your switch on the HP ProCurve Networking Web site at www.procurve.com/manuals. The Premium license is available from your HP ProCurve reseller.

Mini-GBIC Operation Notes

Revision “B” or later mini-GBICs only. This product requires revision “B” or later mini-GBICs (product number ends with the letter “B” or later, for example J4858B or J4859C). These switches do not support revision “A” mini-GBICs.

Use only genuine ProCurve mini-GBICs. Non-HP ProCurve mini-GBICs are not supported. Use of genuine products ensures that your network maintains optimal performance and reliability. Should you require additional HP ProCurve mini-GBICs, please contact a ProCurve sales representative or an authorized reseller.

Hot Swapping mini-GBICs. The mini-GBICs that you can install in your HP ProCurve switch can be “hot swapped” — removed and installed after the switch is receiving power. You should disconnect the network cables from the mini-GBICs before hot swapping them.

Best practice tip: After inserting a mini-GBIC into a switch, the Mode LED will be on for two seconds while the mini-GBIC is initialized. Do not remove the mini-GBIC until the Mode LED has turned off. For the 2600 and 2800 switches: After inserting a transceiver into a 2600 or 2800 switch, the “M” LED will come on to indicate that the mini-GBIC slot is active. Wait at least two seconds after the “M” LED comes on, if you need to remove the transceiver.

When you replace a mini-GBIC with another mini-GBIC of a different type and then execute the **write memory** command in the switch console, the switch configures the port on the new mini-GBIC with the default mode (speed and duplex) settings used for the new mini-GBIC type. The default mode for the mini-GBICs is **Auto**. Note that the switch retains other port-specific configuration settings, such as trunking, Spanning Tree Protocol (STP), and VLAN values that were configured for the previous mini-GBIC.

Connecting the mini-GBICs to Devices with Fixed Configurations . For some older network devices, including some older ProCurve devices, the default for the Gigabit-SX, Gigabit-LX, and Gigabit-LH ports is a fixed configuration, for example 1000 Mbps/Full Duplex, or is otherwise different from these default configurations for the mini-GBICs, which is Auto. As a result, those devices may not connect properly to your mini-GBIC port; you will not get a link. Because of these default configuration and full-duplex considerations, for best operation, you should make sure that the devices connected to the mini-GBIC ports are also configured to Auto. *At a minimum, make sure the configurations match.*

Saving the Configuration after Installing or Exchanging a Module

The following cases automatically result in a change to the running-configuration on your switch:

- Replacing a module with another module of a different type and then rebooting the switch
- Installing a module in a slot that has not previously been used (including when you install a module and apply power to the switch for the first time)

If you want to save such changes to permanent memory (startup-configuration file), use the **write memory** command in the switch's command line interface (CLI). This causes the switch to use the current new hardware configuration for subsequent reboots. (The switch always reboots from the startup-configuration file.)

If you do not save hardware changes to the startup-configuration file, you will be prompted with the following message the next time you use the **boot** or **reload** command:

```
Do you want to save the current configuration [y/n]?
```

For more information on switch memory, including the startup-config and running-config memories, refer to the *Management and Configuration Guide*. For the latest version of ProCurve switch documentation, visit www.procurve.com/manuals.

For more information regarding the software documentation for the Access Controller module refer to either of the following:

- *Release Notes for the HP ProCurve 8200zl Switches* (the latest version is always on the Web).
- *HP ProCurve 8200zl Switches Management and Configuration Guide*.

For the latest version of this documentation, visit www.procurve.com/manuals.

Module Hot-Swap Operation Notes

One of the features of your 8206zl switch is the ability to “hot swap” the switch modules. You can install, exchange, or remove modules after the switch has been powered on. Whenever a module is installed during this process, it is initialized and tested for correct operation. During this process, the switch Self Test LED is on. If you hot swap another module while the switch is initializing and testing the first module, it is possible to cause the first module or the entire switch to be reset.

Hot Swap Precautionary Procedures. To prevent the modules or switch from being reset when you must hot swap multiple modules, follow these simple precautions:

- Before removing or installing any modules, make sure that all network cables are disconnected from the module. Do not remove any modules from the switch while the switch Self Test LED is lit.

© Copyright 2009 Hewlett-Packard
Development Company, L.P.
The information contained herein
is subject to change without notice.



Part Number: 5900-0299
August 2009
Printed in Singapore

